portfolio

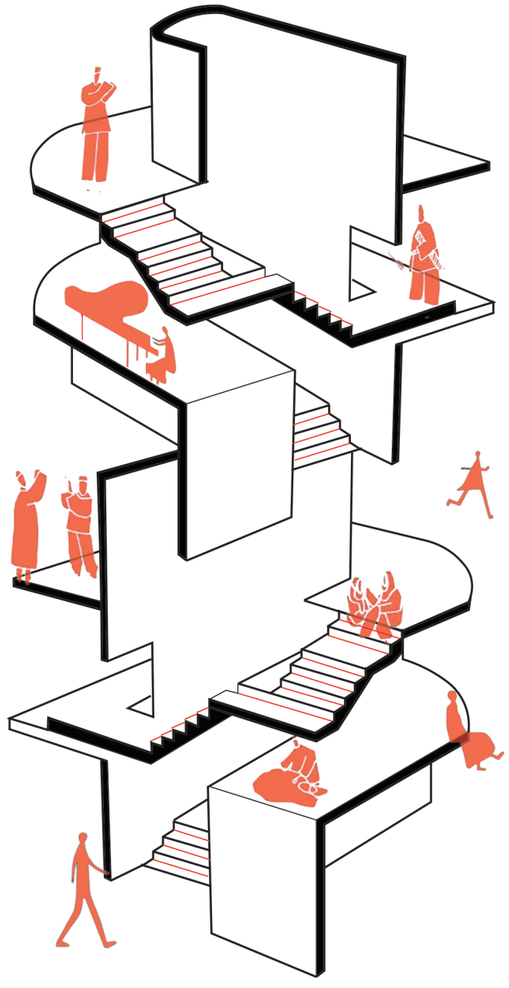

PITI CHO

ARCHITECTURAL DESIGN

SELECTED WORKS

2023 | 2026

PITI CHO

B. Arch, Design

+ 613 581 3998

piticho@cmail.carleton.ca

As a third-year architecture student, my design philosophy centers on context, community, and historical continuity. I aim to create architecture that respects the memory of a site while introducing functional, sustainable modern interventions. Equipped with strong skills in 3D modeling, rendering, and visual presentation workflows, I combine a disciplined academic foundation with a fast-learning, collaborative attitude ready for professional studio teams.

Software Skills

Sketchup	● ● ● ● ●
Photoshop	● ● ● ● ●
Indesign	● ● ● ● ●
Illustrator	● ● ● ● ●
Rhino	● ● ● ●
Revit	● ● ● ●

Languages

Bumese	Native
English	Fluent
Mandarin	Intermediate

Education

2023 – Present
Bachelor of Architecture, Design
Carleton University
Ottawa, ON, Canada

Work Experience

Architecture Intern, Three Swallows — Sept 2026 – Present

- Produced floor plans, section cuts, and detailed wall axonometrics using Revit and Rhino.
- Researched site context, local climate data, and microclimates to guide environmental design choices.
- Coordinated team drawing packages and report submissions to ensure technical accuracy.

Interpreter (Burmese), MCIS — June 2024 – Present

- Provided accurate interpretation between clients and service providers in professional settings
- Demonstrated stong listening, note- taking, and real-time decision making skills
- Facilitated clear communication across language and cultural barriers

Volunteer Work

Assistant teacher, Khaing — March 2019- Sept 2019

- Supported the lead teacher with classtoom activities and lesson preparation
- Demonstrated patience, adaptability, and responsibility
- Demonstrated leadership, responsibility, and teamwork in an educational setting

Competitions

- CCA Interuniversity Charrette | Canadian Centre for Architecture 2025
- Murray & Murray Competition | Carleton University 2023, 2024

CONTENT

01 Community Centre
00 – 07

02 Seniors Centre
08 – 13

03 Chapel
14 – 19



04 Graham House
20 – 24

01 WHERE NATURE MEETS COMMUNITY

Year – 2025 Fall/ Studio 5 (3 months)

Program – Institutional/Civic

Location – Ottawa, Wiggins Private

This community centre is designed as a nature–focused space that encourages connection between people and the surrounding environment. The project emphasizes the use of wood as the primary material to create a warm, natural at–mosphere and a strong relationship with the landscape. A key element of the design is the greenhouse, which brings vegetation and natural light into the building while serving as a shared space for community activities such as gardening, workshops, and small gatherings. Large openings and views toward greenery strengthen the relationship between indoor and outdoor spaces, allowing nature to become an integral part of the experience. Through the integration of timber construction and planted spaces, the project aims to create a welcoming community hub that promotes well–being, social interaction, and environmental awareness.

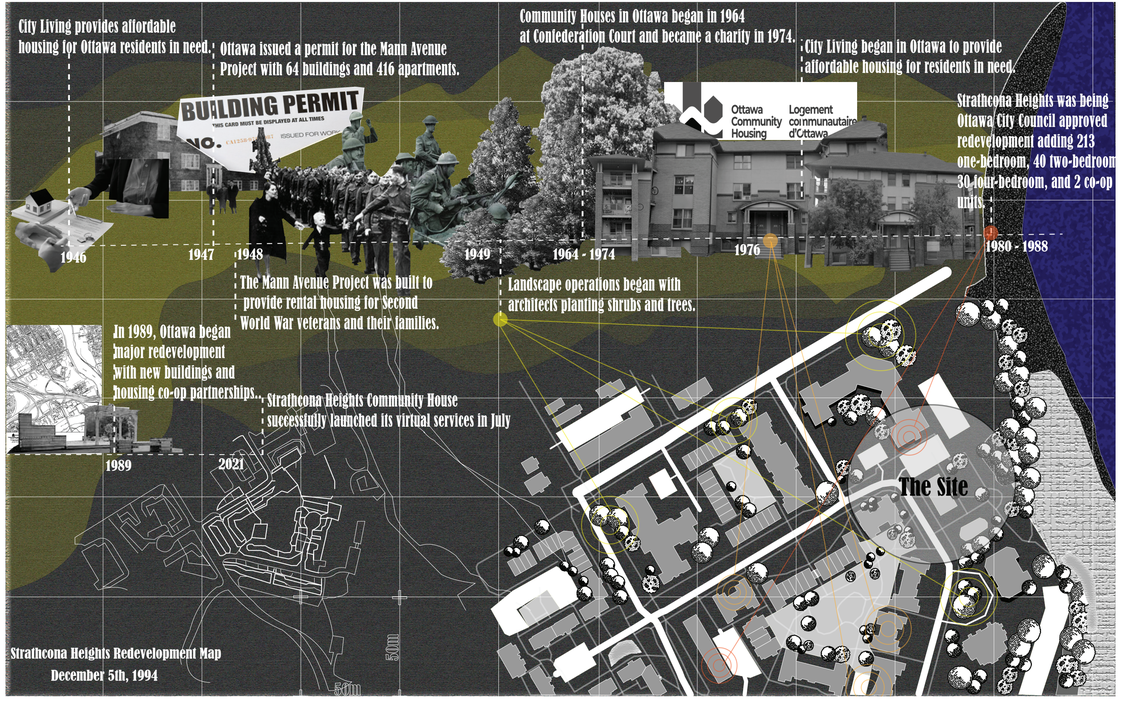

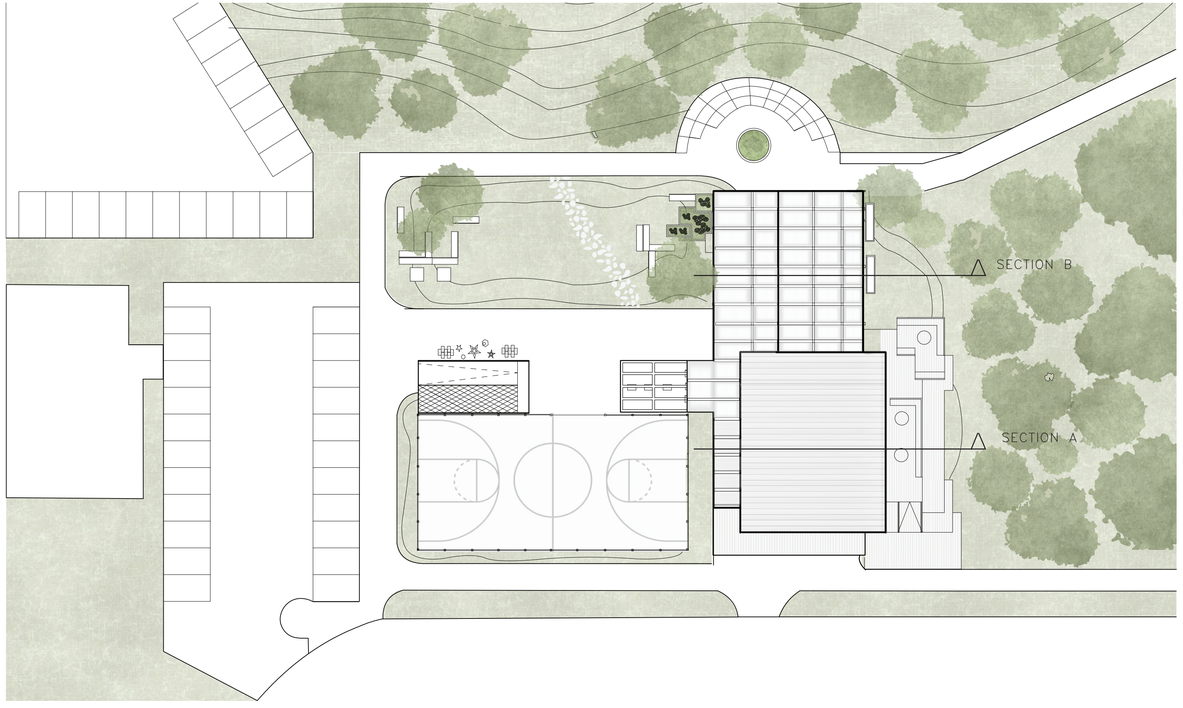
SECTION B
SECTION A

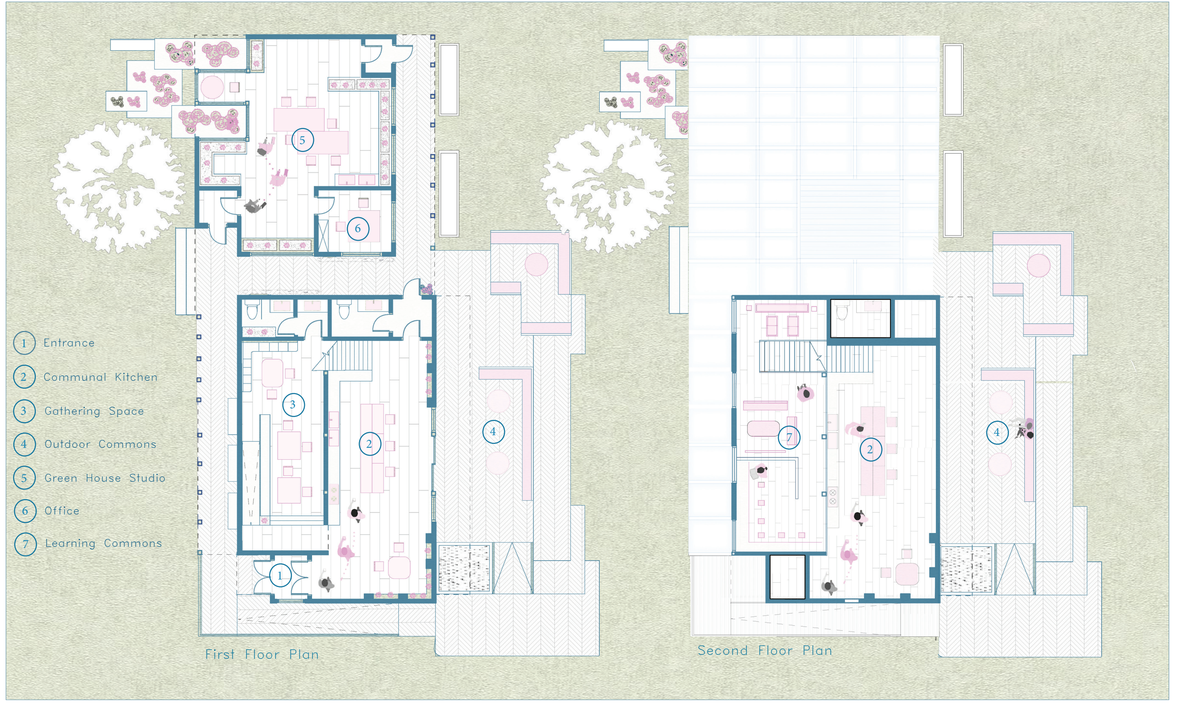
1 Entrance
2 Communal Kitchen
3 Gathering Space
4 Outdoor Commons
5 Green House Studio
6 Office
7 Learning Commons
First Floor Plan
Second Floor Plan

A SECTION CUT THROUGHT THE MAIN COMMUNITY LIVING AREA

A SECTION CUT THROUGHT THE GREEN HOUSE

02 THE LOOP

Year – 2026 Winter/ Studio 6 (3 months)

Program – Civic / Community

Location – Zhujiajiao, Shanghai, China

This seniors centre brings together a health hub, social centre, recreation centre, and kayak club to encourage social interaction and community engagement. The design is organized around a central courtyard, with a surrounding circular pathway that connects the different programs. A second circular circulation route within the buildings creates continuity between interior spaces, guiding movement while maintaining a visual and spatial connection to the courtyard. Through shifting building volumes and layered circulation, the project creates an interconnected environment for gathering, recreation, and everyday activities.

EAST ELEVATION

WEST ELEVATION

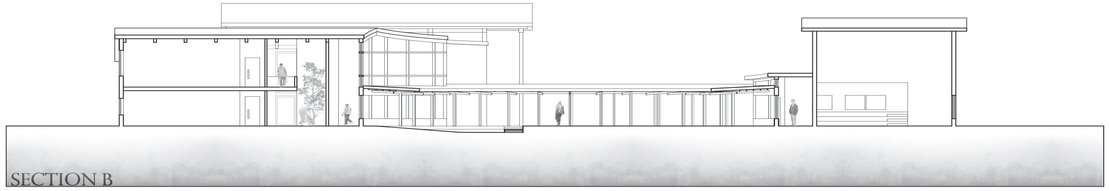

SECTION B

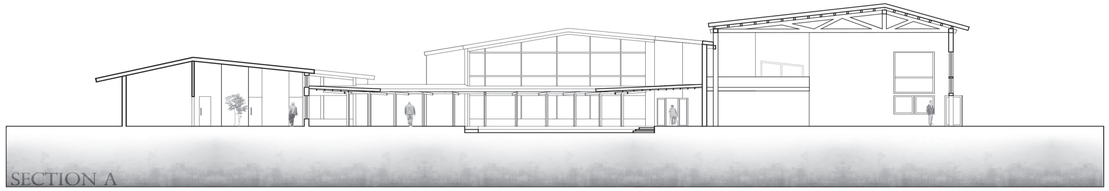

SECTION A

SECTION PERSPECTIVE

03 A PATH TO REFLECTION

Year – 2025 Winter/ Studio 4 (3 months)

Program – Religious/ Place of worship

Location – Ottawa, Carleton University

This chapel is designed as a quiet and contemplative space where architecture supports reflection and meditation. The building is defined by thick masonry walls that create a sense of permanence and enclosure, while carefully placed punched windows allow controlled shafts of natural light to enter the interior. These openings frame small moments of light and shadow, reinforcing the calm and introspective atmosphere of the space. The approach to the chapel is marked by a long, linear path that gradually separates visitors from the surrounding environment. This extended walk acts as a meditative transition, allowing time for reflection before entering the sacred interior. The solid masonry walls, controlled natural light, and the slow approach to the entrance work together to create a space that feels quiet, grounded, and suited for personal reflection.

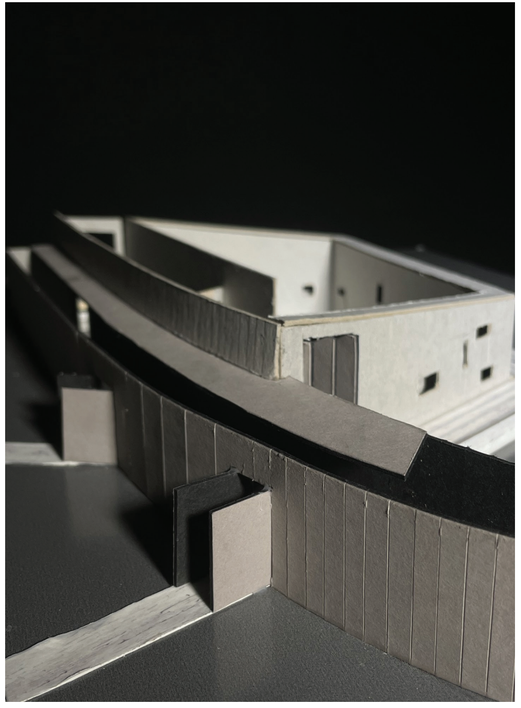





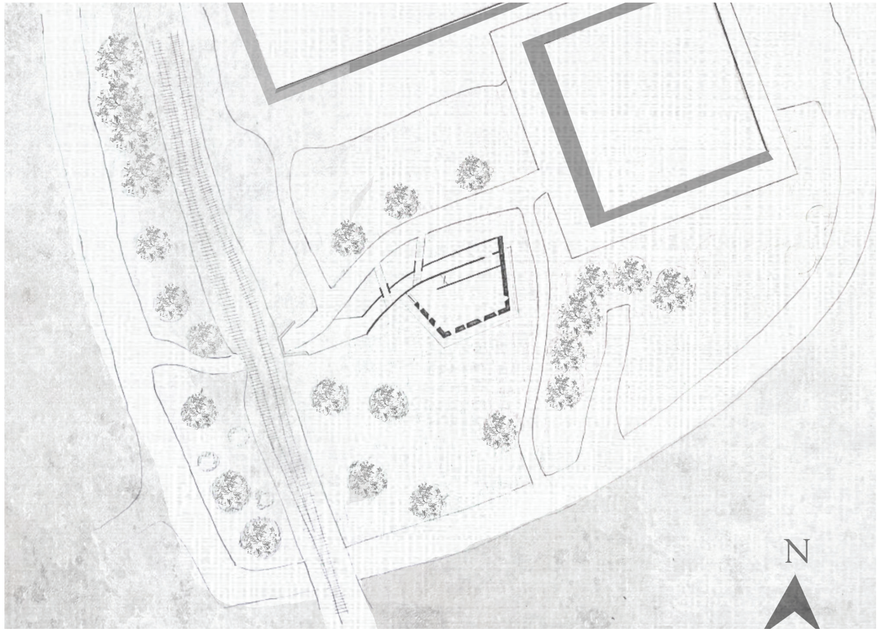
N

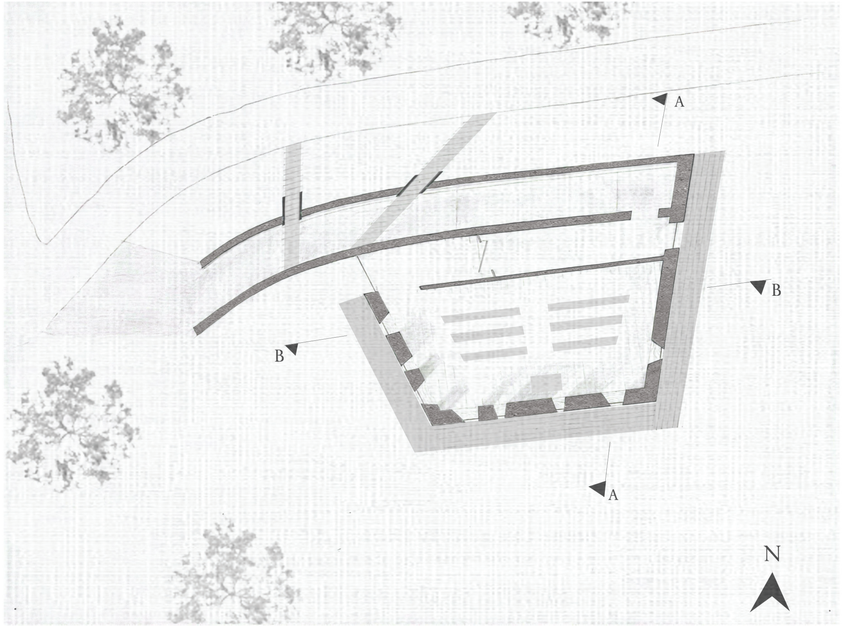
A
B
B
A
N



SOUTH ELEVATION

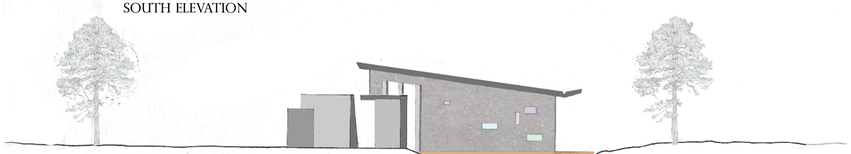

WEST ELEVATION



NORTH ELEVATION

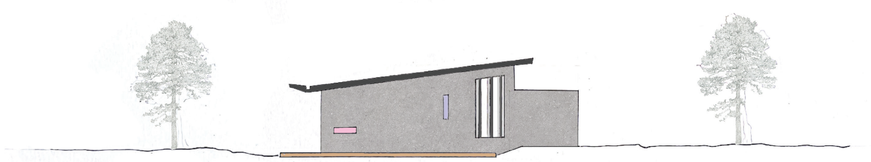

EAST ELEVATION

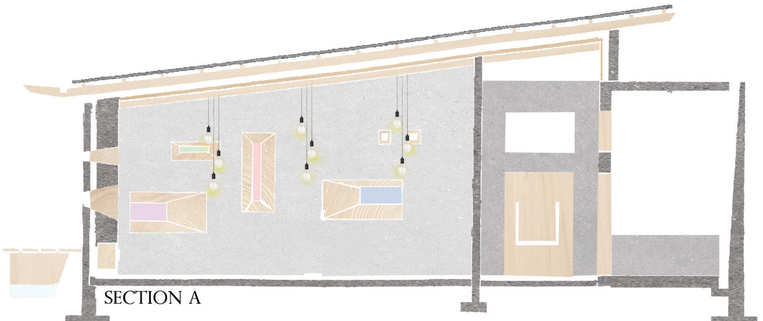

SECTION A

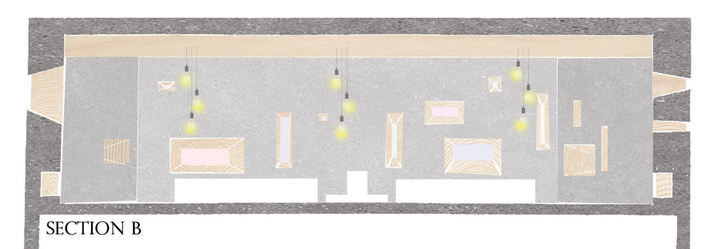

SECTION B

04 RETROFITTING GRAHAM HOUSE

Year – 2025Fall/ Arch tech (3 months)

Program – Residential

Location – Vancouver, B.C

This group project focused on retrofitting Graham House, originally designed by Arthur Erickson. The goal of the project was to relocate the building to a new site and adapt its design to perform efficiently within different environmental conditions. Our team conducted wind, sun, and thermal analyses to understand how the building would respond to its new context and to identify strategies for improving its environmental performance. Based on these studies, we proposed design adjustments that maintain the architectural character of the original house while enhancing comfort, energy efficiency, and responsiveness to climate. The project explores how an existing architectural work can be carefully adapted to new environmental conditions through analysis–driven design decisions.

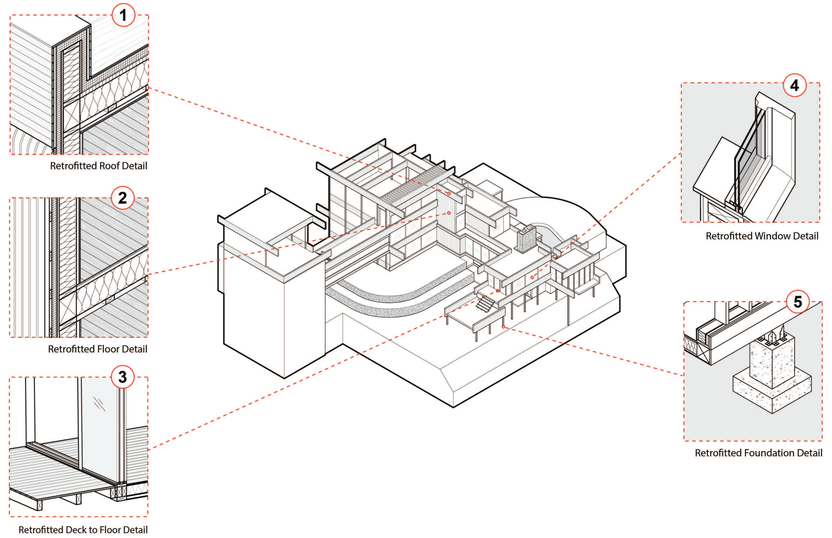

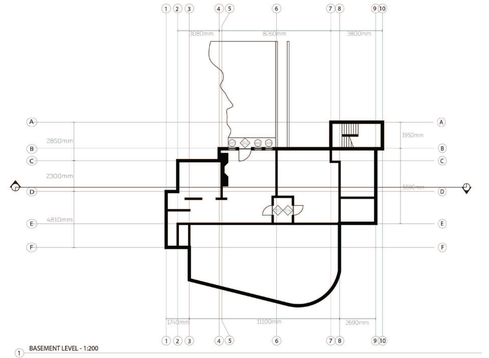

1 BASEMENT LEVEL - 1:200

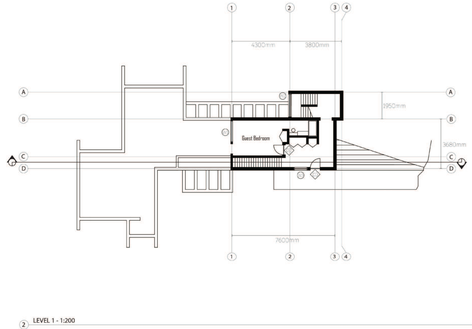

2 LEVEL 1 - 1:200

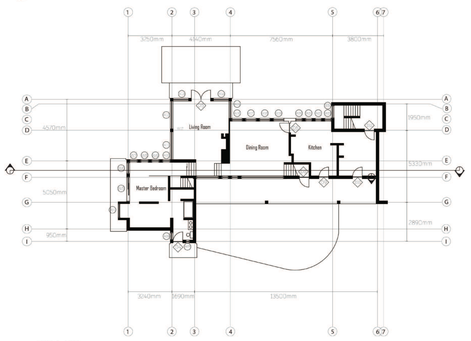

3 LEVEL 2 - 1:200

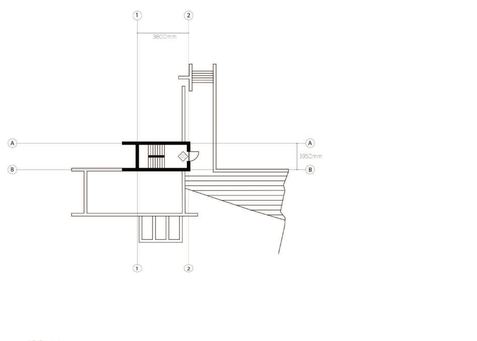

4 LEVEL 3 - 1:200

W - WALL ASSEMBLIES

TYPE	DIAGRAM	DESCRIPTION
W1		**EXISTING WALL ASSEMBLY** 12.5 mm Gypsum board 16 mm Chip board 0.5 mm Vapour barrier 203.2 mm Mineral wool insulation 25 mm Chip board 44 mm Vertical cladding
W2		**RETROFITTED WALL ASSEMBLY** 12.5 mm Gypsum board 16 mm Chip board 0.5 mm Vapour barrier 203.2 mm Wood fibre batt insulation 25 mm Chip board 0.5 mm Breather membrane 60 mm Wood fibre rigid insulation 25 mm Beam 44 mm Vertical cladding

R- ROOF ASSEMBLIES

TYPE	DIAGRAM	DESCRIPTION
R1		**EXISTING ROOF ASSEMBLY** 12.7 mm Gypsum sheathing 38 mm Douglas fir 0.5 mm Vapour barrier 203.2 mm Mineral wool insulation 31.7 mm Douglas fir 0.5 mm Bitumen membranes 25.4 mm Douglas fir
R2		**RETROFITTED ROOF ASSEMBLY** 12.7 mm Gypsum sheathing 38 mm Douglas fir 0.5 mm Vapour barrier 203.2 mm Wood fibre batt insulation 31.7 mm Beams 0.5 mm Breather membrane 101.6 mm Wood fibre rigid insulation 38.1 mm Rear ventilated level 25.4 mm Douglas fir

F - INTERIOR FLOOR ASSEMBLIES

TYPE	DIAGRAM	DESCRIPTION
F1		**EXISTING FLOOR ASSEMBLY** 20 mm Douglas Fir flooring 16 mm OSB 0.5 mm Vapour barrier 203.2 mm Douglas Fir joists 0.5 mm Breather membrane 38 mm Douglas Fir strapping 12.5 mm Gypsum board
F2		**RETROFITTED FLOOR ASSEMBLY** 20 mm Douglas Fir flooring 16 mm OSB 0.5 mm Vapour barrier 203.2 mm Wood fibre batt insulation 0.5 mm Breather membrane 38 mm Douglas Fir strapping 12.5 mm Gypsum board

F - EXTERIOR FLOOR ASSEMBLIES

TYPE	DIAGRAM	DESCRIPTION
F3		**EXISTING FLOOR ASSEMBLY** 20 mm Douglas Fir flooring 16 mm OSB 0.5 mm Vapour barrier 203.2 mm Mineral wool insulation 0.5 mm Breather membrane 38 mm Douglas Fir strapping 3 mm Lamination
F4		**RETROFITTED FLOOR ASSEMBLY** 20 mm Douglas Fir flooring 16 mm OSB 0.5 mm Vapour barrier 203.2 mm Wood fibre batt insulation 0.5 mm Breather membrane 38 mm Douglas Fir strapping 3 mm Lamination

Existing Exterior Floor to Decking

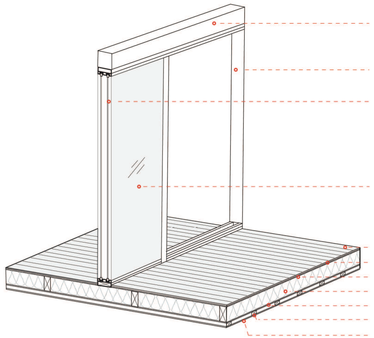

Douglas Fir Wood Beam 8"x 8"

Douglas Fir Wood Post 8"x 8"

Single Pane Glass

Sliding Door

Hardwood Plank
Oriented Strand Board
Vapour Barrier
Wood Fibre Insulation Board
Breather membrane
Wood Strapping 2"x 4"
Lamination

Retrofitted Exterior Floor to Decking

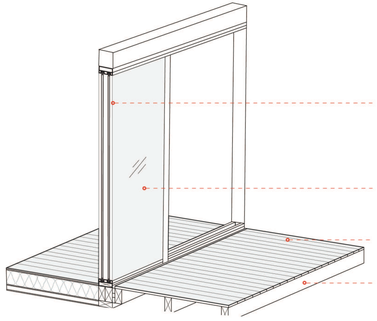

Double Pane Glass

Sliding Door

Douglas Fir Slats

Floor Joists 4"x4"

Existing Exterior floor to decking Section 1: 20



In the existing condition, the continuous floor extending to the exterior deck creates a direct thermal bridge, increasing heat loss, lowering surface temperatures at the threshold, raising condensation risk, and complicating waterproofing and drainage.

Retrofitted Sliding door Plan 1: 25



The retrofitted double-glazed door introduces an insulating air between the panes, greatly improving the U-value, reducing conductive heat transfer, maintaining warmer interior surfaces, lowering condensation risk, improving acoustic performance, and creating a more comfortable indoor environment adjacent to the opening.

Retrofitted Exterior floor to decking Section 1: 20



In the retrofitted condition, the floor is separated at the sliding door, introducing a thermal break that reduces conductive heat transfer, improves interior comfort by raising surface temperatures, and simplifies flashing and moisture control by preventing water pathways into the interior assembly.

THANK YOU.